

### Signature Series Friction Feeder Family 300 Millimeter Width Capability


# MFT 350 v<sup>3</sup>

## High Performance - Reliable - Cost Effective




#### 1 3 Piece Shaft allowing for easy belt changeover

The hardened stainless steel shafts and sealed bearings will provide maximum life expectancy and 24-hour a day operation.



#### 2 Brushless Servo Motor for precise placement

The v3 series is powered by a 500 watt brushless servo motor.



#### 3 Self-contained computer controls with on-board panel

MultiFeeder's all-in-one self-contained electronics software platform is flexible to run many different types of applications. Designed for easy interface with existing computer, PLC or other host machinery.



Friction Feeder MFT 350XED v3 assembly unit

### Features

- Mechanical design is modular for many custom configurations
- Simplified control interface software package ensures flexible and precise control
- Infrared sensor for accurate count. Upgradeable to double-detect and overlap detection
- Single-sided controls provide for efficient operation
- Performance designed for long production runs
- Patented "feed separating" mechanism
- Closed loop system with encoder feedback

### Industries:

- Pharmaceutical
- Food
- Cosmetics
- Packaging
- Financial
- Printing
- Robotics

### Common equipment that the feeder can be integrated into:

- Conveyers
- Shrinkwrappers
- Existing bases
- Poly-baggers
- Folder/Gluer
- Flow Wrappers
- Order fulfillment
- Case-packers
- Cartoners
- Collators
- Banders

### Applications

- Insertion into a catch-tray, box or conveyor
- Deliver a product to a secondary application
- Batching, EZ tipping, or affixing and collating systems

## Technical Data: MFT 350 v<sup>3</sup>

### Equipment Specifications

Typical Height	856mm (31.7")
Typical Length (ED)	645mm (25.4")
Typical Width	637mm (25.1")
Maximum Belt Speed	140 Meters per Minute*
Power Requirements	110/220V 50-60Hz 6A
Operating Temp.	10°-35°C (50°-95°F)
Weight Ranges	75-125 lbs.
Operating Humidity	30-90%

### Product Specifications

Minimum Size	50mm† (W) x 50mm (L)
Maximum Size*	300mm (W) x 325mm (L)‡
Minimum Thickness	0.075mm (.003")
Maximum Thickness	25mm

† Minimum product length may require narrow belt configuration.


‡ Maximum Product Length is dependent on product, equipment configuration and application. Longer lengths are available with optional upgrades.

\*All Multifeeder Technology® equipment can be designed to meet your specific production requirements. Please contact one of our experienced Application Engineers to discuss many solution options available to you.

### Product examples to deliver through feeder:

- Bags
- Gift Cards
- Carton Blanks
- Pouches
- Clear-Film Plastics- Coupons
- Tyvek® Sheets
- Pamphlets
- Magnets
- Pharma Inserts
- Card Stock Products
- Bandages
- And more

### Standard Dimensional Drawing

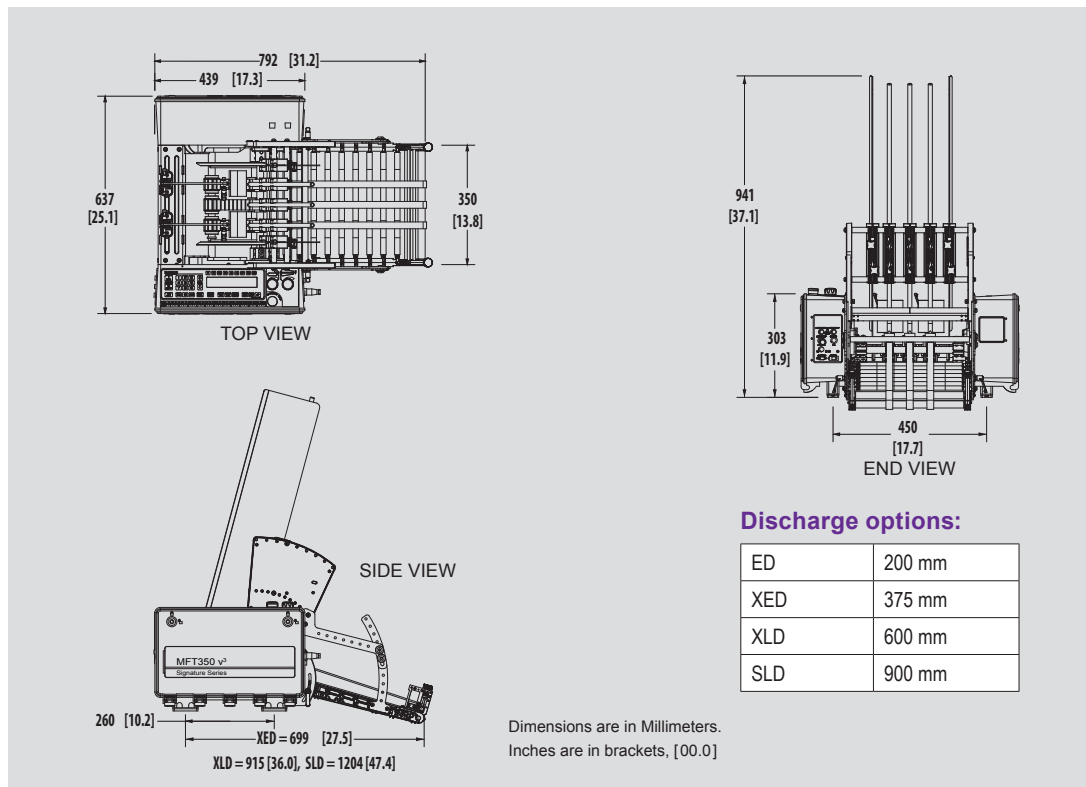

All specifications are subject to change without notice.

**Multifeeder Technology** provides high performance friction feeding and labeling solutions throughout the world. With state-of-the-art control technology and robust mechanics, our products feed more quickly and accurately to provide customers with a greater value of return. All feeders, labelers and accessories can easily be integrated with other machines to provide a total system solution for any application.

**Multifeeder**  
TECHNOLOGY

[www.multifeeder.com](http://www.multifeeder.com)

© 2018 Multifeeder Technology



### Technical Support Services

Our dedicated team of experienced Technicians and Application Engineers have the proper training and necessary credentials to answer any questions and offer system solution recommendations for your project needs. Contact us at: (651) 407-3100 ext 123

Multifeeder Technology®  
4821 White Bear Parkway  
St. Paul, MN 55110  
Phone: 651-407-3100  
Fax: (651) 407-3199  
[marketing@multifeeder.com](mailto:marketing@multifeeder.com)

2018-08 #005