


Signature Series Friction Feeder Family 500 Millimeter Width Capability


MFT 550 v³

High Performance - Reliable - Cost Effective

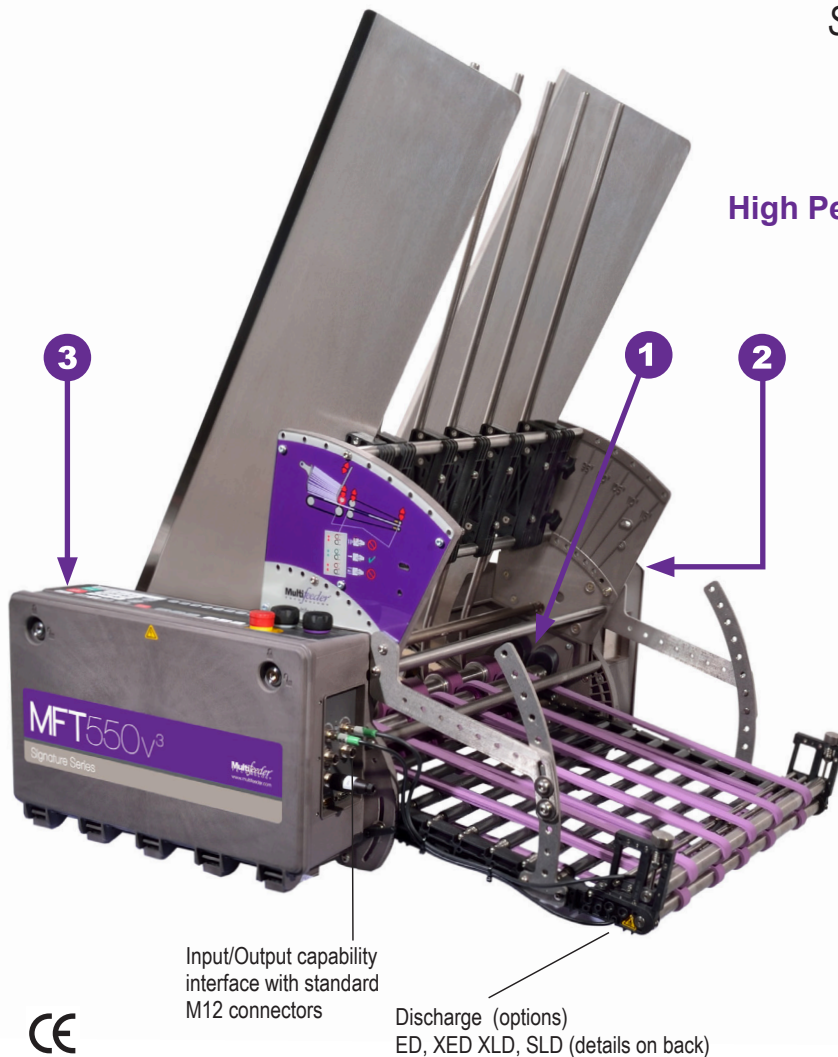


1 3 Piece Shaft allowing for easy belt changeover

The hardened stainless steel shafts and sealed bearings will provide maximum life expectancy and 24-hour a day operation.



2 Brushless Servo Motor for precise placement

The v3 series is powered by a 750 watt brushless servo motor.



3 Self-contained computer controls with on-board panel

MultiFeeder's all-in-one self-contained electronics software platform is flexible to run many different types of applications. Designed for easy interface with existing computer, PLC or other host machinery.



Friction Feeder MFT 550XED v3 assembly unit

Features

- Mechanical design is modular for many custom configurations
- Simplified control interface software package ensures flexible and precise control
- Infrared sensor for accurate count. Upgradeable to double-detect and overlap detection
- Single-sided controls provide for efficient operation
- Performance designed for long production runs
- Patented "feed separating" mechanism
- Closed loop system with encoder feedback

Industries:

- Pharmaceutical
- Food
- Cosmetics
- Packaging
- Financial
- Printing
- Robotics

Common equipment that the feeder can be integrated into:

- Conveyers
- Shrinkwrappers
- Existing bases
- Poly-baggers
- Folder/Gluer
- Flow Wrappers
- Order fulfillment
- Case-packers
- Cartoners
- Collators
- Banders

Applications

- Insertion into a catch-tray, box or conveyor
- Deliver a product to a secondary application
- Batching, EZ tipping, or affixing and collating systems

Technical Data: MFT 550 v³

Equipment Specifications

Typical Height	856mm (31.7")
Typical Length (ED)	645mm (25.4")
Typical Width	837mm (32.9")
Maximum Belt Speed	140 Meters per Minute*
Power Requirements	110/220V 50-60Hz 6A
Operating Temp.	10°-35°C (50°-95°F)
Weight Ranges	75-125 lbs.
Operating Humidity	30-90%

Product Specifications

Minimum Size	50mm† (W) x 50mm (L)
Maximum Size*	500mm (W) x 325mm (L)‡
Minimum Thickness	0.075mm (.003")
Maximum Thickness	25mm

† Minimum product length may require narrow belt configuration.


‡ Maximum Product Length is dependent on product, equipment configuration and application. Longer lengths are available with optional upgrades.

*All Multifeder Technology® equipment can be designed to meet your specific production requirements. Please contact one of our experienced Application Engineers to discuss many solution options available to you.

Product examples to deliver through feeder:

- Bags
- Gift Cards
- Carton Blanks
- Pouches
- Clear-Film Plastics- Coupons
- Tyvek® Sheets
- Pamphlets
- Magnets
- Pharma Inserts
- Card Stock Products
- Bandages
- And more

Standard Dimensional Drawing

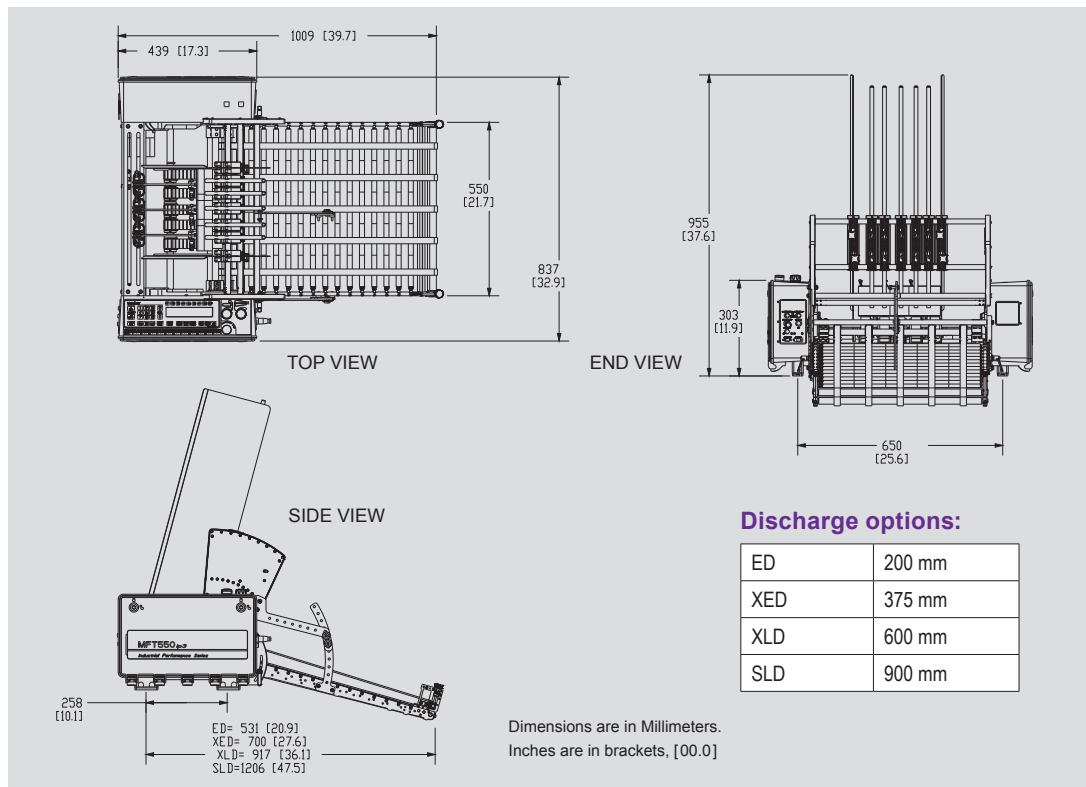

Technical Support Services

Our dedicated team of experienced Technicians and Application Engineers have the proper training and necessary credentials to answer any questions and offer system solution recommendations for your project needs. Contact us at: (651) 407-3100 ext 123

Multifeeder Technology provides high premium performance friction feeding and labeling system solutions throughout the world. With state-of-the-art control technology, our products feed more quickly and accurately to provide customers with a greater value of return. All feeders and accessories can easily be integrated with other machines to provide a total system solution for any application.



www.multifeeder.com

© 2018 Multifeeder Technology

Multifeeder Technology®
4821 White Bear Parkway
St. Paul, MN 55110
Phone: 651-407-3100
Fax: (651) 407-3199
marketing@multifeeder.com

2018-08 #007